

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 1 472 984 A1**

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
03.11.2004 Bulletin 2004/45

(51) Int Cl.⁷: **A61B 18/12**

(21) Application number: **04009964.0**

(22) Date of filing: **27.04.2004**

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IT LI LU MC NL PL PT RO SE SI SK TR**
Designated Extension States:
AL HR LT LV MK

(30) Priority: **01.05.2003 US 427832**

(71) Applicant: **Sherwood Services AG**
8200 Schaffhausen (CH)

(72) Inventors:
• **Buyse, Steven P.**
Longmont CO 80501 (US)
• **Felton, Bret**
Erie CO 80516 (US)
• **Heard, David Nichols**
Boulder CO 80303 (US)
• **Keppel, David**
Longmont CO 80501 (US)

• **Podhajsky, Ronald J.**
Boulder CO 80301 (US)
• **F. Schmaltz, Dale**
Fort Collins CO 80524 (US)
• **Wham, Robert H.**
Boulder CO 80305 (US)
• **Meagher, Edward C.**
Greenlawn NY 11740 (US)
• **Ryland Lawes, Kate**
Superior CO 80027 (US)
• **Schechter, Dave A.**
Longmont CO 80503 (US)
• **Shields, Chelsea**
Boulder CO 80304 (US)
• **Tetzlaff, Philip M.**
Superior CO 80027 (US)

(74) Representative: **HOFFMANN - EITLE**
Patent- und Rechtsanwälte
Arabellastrasse 4
81925 München (DE)

(54) **Method and control system for performing electrosurgical procedures**

(57) A closed-loop control system is disclosed for use with an electrosurgical generator that generates electrosurgical energy. The closed loop control system includes a user interface for allowing a user to select at least one pre-surgical parameter, such as the type of surgical instrument operatively connected to the generator, the type of tissue and the desired surgical effect. A sensor module is also included for continually sensing at least one of electrical and physical properties proximate a surgical site and generating at least one signal relating thereto. The system also includes a control module for continually receiving the at least one selected pre-surgical parameter from the user interface and each of the signals from the sensor module, and processing each of the signals in accordance with the at least one pre-surgical parameter using at least one of a microprocessor, computer algorithm and a mapping. The control module generates at least one corresponding control signal relating to each signal from the sensor module, and relays the control signal to the electrosurgical generator for controlling the same. A method is also disclosed for performing an electrosurgical procedure at a surgical site on a patient. The method in-

cludes the steps of: applying at least one electrical pulse to the surgical site; continually sensing electrical and physical properties proximate the surgical site; and varying pulse parameters of individual pulses of the at least one pulse in accordance with the continually-sensed properties.

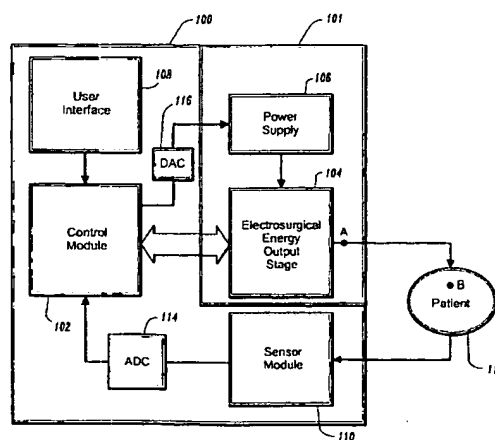


FIG. 1

EP 1 472 984 A1

Description

BACKGROUND

[0001] The present invention is directed to electrosurgical surgery and, in particular, to a closed loop-control system for an electrosurgical generator.

Technical Field

[0002] Electrosurgical generators are employed by surgeons in conjunction with an electrosurgical instrument to cut, coagulate, dessicate and/or seal patient tissue. High frequency electrical energy, e.g., radio frequency (RF) energy, is produced by the electrosurgical generator and applied to the tissue by the electrosurgical tool. Both monopolar and bipolar configurations are commonly used during electrosurgical procedures.

[0003] Electrosurgical techniques and instruments can be used to coagulate small diameter blood vessels or to seal large diameter vessels or tissue, e.g., soft tissue structures, such as lung, brain and intestine. A surgeon can either cauterize, coagulate/desiccate and/or simply reduce or slow bleeding, by controlling the intensity, frequency and duration of the electrosurgical energy applied between the electrodes and through the tissue. For the purposes herein, the term "cauterization" is defined as the use of heat to destroy tissue (also called "diathermy" or "electrodiathermy"). The term "coagulation" is defined as a process of desiccating tissue wherein the tissue cells are ruptured and dried. "Vessel sealing" is defined as the process of liquefying the collagen and elastin in the tissue so that it reforms into a fused mass with significantly-reduced demarcation between the opposing tissue structures (opposing walls of the lumen). Coagulation of small vessels is usually sufficient to permanently close them. Larger vessels or tissue need to be sealed to assure permanent closure.

[0004] In order to achieve one of the above desired surgical effects without causing unwanted charring of tissue at the surgical site or causing collateral damage to adjacent tissue, e.g., thermal spread, it is necessary to control the output from the electrosurgical generator, e.g., power, waveform, voltage, current, pulse rate, etc.

[0005] It is known that measuring the electrical impedance and change thereof across the tissue at the surgical site provides a good indication of the state of desiccation or drying of the tissue, e.g., as the tissue dries or loses moisture, the impedance across the tissue rises. This observation has been utilized in some electrosurgical generators to regulate the electrosurgical power based on a measurement of tissue impedance. For example, commonly owned U.S. Patent Number 6,210,403 relates to a system and method for automatically measuring the tissue impedance and altering the output of the electrosurgical generator based on the measured impedance across the tissue. The entire contents of this patent is hereby incorporated by reference

herein.

[0006] It has been determined that the particular waveform of electrosurgical energy can be tailored to enhance a desired surgical effect, e.g., cutting, coagulation, sealing, blend, etc. For example, the "cutting" mode typically entails generating an uninterrupted sinusoidal waveform in the frequency range of 100kHz to 4MHz with a crest factor in the range of 1.4 to 2.0. The "blend" mode typically entails generating an uninterrupted cut waveform with a duty cycle in the range of 25% to 75% and a crest factor in the range of 2.0 to 5.0. The "coagulate" mode typically entails generating an uninterrupted waveform with a duty cycle of approximately 10% or less and a crest factor in the range of 5.0 to 12.0. In order to effectively and consistently seal vessels or tissue, a pulse-like waveform is preferred. Energy may be supplied in a continuous fashion to seal vessels in tissue if the energy input/output is responsive to tissue hydration/volume through feedback control. Delivery of the electrosurgical energy in pulses allows the tissue to cool down and also allows some moisture to return to the tissue between pulses which are both known to enhance the sealing process.

[0007] It is further known to clamp or clip excess voltage output from the electrosurgical generator by the use of avalanche devices, such as diodes, zener diodes and transorbs, resulting in absorption and dissipation of excess energy in the form of heat.

[0008] Commonly owned U.S. Patent No. 6,398,779 discloses a sensor which measures the initial tissue impedance with a calibrating pulse which, in turn, sets various electrical parameters based on a look-up table stored in a computer database. The transient pulse width associated with each pulse measured during activation is used to set the duty cycle and amplitude of the next pulse. Generation of electrosurgical power is automatically terminated based on a predetermined value of the tissue impedance across the tissue.

[0009] Thus a need exists to develop an electrosurgical generator having improved control circuitry and/or processing for providing continuous control of various electrical parameters (e.g., pulse frequency and intensity, voltage, current, power) of the electrosurgical generator based upon sensing information obtained from the surgical site relating to tissue impedance, changes in tissue impedance, tissue temperature, changes in tissue temperature, surgical intent (e.g., cutting, coagulating, sealing), tissue type, leakage current, applied voltage, applied current, tissue hydration levels, tissue compliance, and/or tissue optic transmission.

SUMMARY

[0010] A method is disclosed for performing an electrosurgical procedure at a surgical site on a patient. The method includes the steps of claim 1.

[0011] A closed-loop control system is also disclosed for use with an electrosurgical generator that generates

electrosurgical energy, as described in claim 8. The closed loop control system includes a user interface for allowing a user to select at least one pre-surgical parameter, such as the type of surgical instrument operatively connected to the generator, the type of tissue and/or desired surgical effect. A sensor module is also included for continually sensing at least one of electrical and physical properties proximate a surgical site and generating at least one signal relating thereto. The closed loop control system also includes a control module for continually receiving the selected at least one pre-surgical parameter from the user interface and each of the signals from the sensor module, and processing each of the signals in accordance with the at least one pre-surgical parameter using a microprocessor, computer algorithm and/or a mapping (e.g., look-up table, continuous mapping and equivalent). The control module generates at least one corresponding control signal relating to each signal from the sensor module, and relays the control signal to the electrosurgical generator for controlling the generator.

[0012] Finally, a system for electrosurgically sealing tissue is claimed in claim 34.

BRIEF DESCRIPTION OF THE DRAWINGS

[0013] Various embodiments will be described herein below with reference to the drawings wherein:

Fig. 1 is a schematic diagram of a closed-loop control system for use with an electrosurgical generator according to the present disclosure;

Fig. 2 is a schematic diagram of a sensor module for use with the closed-loop control system of Fig. 1;

Fig. 3 is a flowchart illustrating a method of operation of the closed-loop control system according to the present disclosure; and

Fig. 4 is a block diagram of a dual loop control system in accordance with another embodiment of the invention.

DETAILED DESCRIPTION

[0014] Reference is made to the drawings where like reference numerals refer to similar elements throughout the various figures. Referring to FIG. 1, there is shown a schematic diagram of one embodiment of the presently disclosed closed loop control system 100 for use with an electrosurgical generator 101. Control system 100 includes a control module 102, user interface 108 and sensor module 110. The control module 102 is operatively connected to the electrosurgical generator 101. The electrosurgical generator 101 preferably includes electrosurgical energy output stage 104 and a power supply 106, where the output stage 104 receives power

from the power supply 106 and delivers RF energy to a patient 112 via at least one electrode (not shown). As can be appreciated one or more electrodes may be used with the electrosurgical instrument for performing monopolar or bipolar surgery.

[0015] The sensor module 110 senses various electrical and physical parameters or properties at the operating site and communicates with the control module 102 to regulate the electrosurgical output from the output stage 104. It is envisioned that the sensor module 110 may be configured to measure or "sense" various electrical or electromechanical conditions at the operating site such as: tissue impedance, changes in tissue impedance, tissue temperature, changes in tissue temperature, leakage current, applied voltage and applied current. Preferably, the sensor module 110 measures one or more of these conditions continuously or in "real time" such that the control module 102 can continually modulate the electrosurgical output according to a specific purpose or desired surgical intent. More particularly, analog signals provided by the sensor module 110 are converted to digital signals via an analog-to-digital converter (ADC) 114, which in turn are provided to the control module 102.

[0016] The control module 102, thereafter, regulates the power supply 106 and/or the output stage 104 according to the information obtained from the sensor module 110. The user interface 108 is electrically connected to the control module 102 to allow the user to control various parameters of the electrosurgical energy output to the patient 114 during surgery to manually set, regulate and/or control one or more electrical parameters of the delivered RF energy, such as voltage, current, power, frequency, amplified, and/or pulse parameters, e.g., pulse width, duty cycle, crest factor, and/or repetition rate depending upon a particular purpose or to change surgical intent.

[0017] The control module 102 includes at least one microprocessor capable of executing software instructions for processing data received by the user interface 108 and the sensor module 110 for outputting control signals to the output stage 104 and/or the power supply 106, accordingly. The software instructions executable by the control module are stored in an internal memory in the control module 102, an internal or external memory bank accessible by the control module 102 and/or an external memory, e.g., an external hard drive, floppy diskette, CD-ROM, etc. Control signals from the control module 102 to the electrosurgical generator 101 may be converted to analog signals by a digital-to-analog converter (DAC) 116.

[0018] The power supply 106 is preferably a high voltage DC power supply for producing electrosurgical current, e.g., radiofrequency (RF) current. Signals received from the control module 102 control the magnitude of the voltage and current output by the DC power supply. The output stage 104 receives the output current from the DC power supply and generates one or more pulses

via a waveform generator (not shown). As can be appreciated, the pulse parameters, such as pulse width, duty cycle, crest factor and repetition rate are regulated in response to the signals received from the control module 102. Alternatively, the power supply 106 may be an AC power supply, and the output stage 104 may vary the waveform of the signal received from power supply 106 to achieve a desired waveform.

[0019] As mentioned above, the user interface 108 may be local to or remote from the control module 102. A user may enter data such as the type of electrosurgical instrument being used, the type of electrosurgical procedure to be performed, and/or the tissue type upon which the electrosurgical procedure is being performed. It is envisioned that the closed loop control system 100, in particular the sensor module, may include one or more smart sensors which provide feedback to the surgeon relating to one or more of these physical parameters. Furthermore, the user may enter commands, such as a target effective voltage, current or power level to be maintained, or a target response e.g., change in regulation of the power supply 106 and/or output stage 104, to changes in sensed values, such as an effective change in voltage, current and/or power level as a function of the changes. Preferably, the user may also enter commands for controlling electrical parameters of the RF energy, delivered by the electrosurgical generator 101, as described above. It is envisioned that default values are provided for the above target levels and target responses.

[0020] The sensor module 110 includes a plurality of sensors (not shown) strategically located for sensing various properties or conditions at or proximate points "A" and "B". Sensors positioned at or proximate point "A" (hereinafter referred to as at point "A") sense properties and/or parameters of electrosurgical output from output stage 104, and/or properties, parameters or conditions prior to surgical effect of the currently administered electrosurgical energy during the surgical procedure. For example, sensors positioned at point "A" may be provided with or attached proximate the generator 101.

[0021] Sensors positioned at or proximate point "B" (hereinafter referred to as at point "B") sense parameters, properties and/or conditions at or across the operating site prior to the surgical procedure and/or in response to surgical effect during the surgical procedure. Preferably, one or more of these sensors may be included with the electrosurgical instrument, (e.g., on one end effector or opposing end effectors) or attached proximate the operating site. For example, optical sensors, proximity sensors, temperature sensors may be used to detect certain tissue characteristics, and electrical sensors may be employed to sense other parameters of the tissue or operating effects. It is noteworthy that point "A" may be located proximate the surgical site "B" at a location where the signals outputted by the generator 101 are propagated before they are applied or approximate-

ly when they are applied to the surgical site "B".

[0022] The sensors are provided with leads or wireless means for transmitting information to the control module, where the information is provided directly to the control module 102, and/or provided to the control module 102 via the sensor module 110 and/or the ADC 114. The sensor module 110 may include means for receiving information from multiple sensors, and providing the information and the source of the information (e.g., the particular sensor providing the information) to the control module 102.

[0023] With reference to FIG. 2, the inner-working components of the sensor module 110 are shown in greater detail. More particularly, the sensor module 110 preferably includes a real-time voltage sensing system 202 and a real-time current sensing system 204 for sensing real-time values for applied voltage and current at the surgical site "B". The sensor module 110 also preferably includes a real-time voltage sensing system 206 and a real-time current sensing system 208 for sensing real-time values of signals returned from the patient at a point "A". An RMS voltage sensing system 210 and an RMS current sensing system 212 are also included for sensing and deriving RMS values for applied voltage and current at the surgical site "B", and an RMS voltage sensing system 214 and an RMS current sensing system 216 are included for sensing and deriving RMS values of signals at point "A". A temperature sensing system 218 is preferably included for sensing tissue temperature at the surgical site "B". Real-time and RMS current and voltage sensing systems are known in the art. The sensor module 110 may further include sensors (not shown) for sensing voltage and current output by the generator.

[0024] The measured or sensed values are further processed, either by circuitry and/or a processor (not shown) in the sensor module 110 and/or by the control module 102, for deriving changes in sensed values and tissue impedance at the surgical site "B". Tissue impedance and changes in tissue impedance may be determined by measuring the voltage and/or current across the tissue and/or calculating changes thereof over time, and comparing the voltage and current values to known and/or desired values associated with various tissue types for use by the control system 100 to drive electrical output to achieve desired impedance and/or change in impedance values. As can be appreciated, these known and/or desired values, tissue types and ranges may be stored in an internal look-up table, "a continuous value map" or in an external searchable memory. Commonly owned U.S. Patent No. 6,398,779, U.S. Patent No. 6,203,541, U.S. Patent No. 5,827,271 and U.S. Application Serial No 10,073,761 disclose methods for measuring tissue impedance, and are incorporated by reference herein in their entirety.

[0025] It is envisioned that deriving tissue impedance (or other physical and electrical parameters) from real-time value(s) provides the benefit of monitoring real-

time tissue impedance and/or changes in tissue impedance. As the surgical procedure proceeds, it is believed that the tissue impedance fluctuates in response to removal and restoration of liquids from the tissue at the surgical site "B". As the control module 102 monitors the tissue impedance and changes in tissue impedance (or other physical and electrical parameters) the control module 102 regulates the power supply 106 and output stage 104 accordingly for achieving the desired and optimal electrosurgical effect.

[0026] Before beginning an electrosurgical procedure, an operator of the electrosurgical instrument enters information via the user interface 108. Information entered includes, for example, the type of electrosurgical instrument being used, the type of procedure being performed (i.e., desired surgical effect), the type of tissue, relevant patient information, and a control mode setting. The control mode setting determines the amount of or type of control that the control module 102 will provide. As mentioned above, one or more sensors (not shown) may also be included to automatically provide information to the control module 102 relating to tissue type, initial tissue thickness, initial tissue impedance, etc.

[0027] Exemplary modes include, but are not limited to, one or a combination of one or more of the following modes: a first mode wherein the control module 102 maintains a steady selected output power, current and/or voltage value at site "A"; a second mode wherein the control module 102 maintains a steady selected output power, current and/or voltage value at site "B"; a third mode wherein the control module 102 maintains a variable selected output power, current and/or voltage values at site "A" which is dependent upon (i.e., a function of) time value(s) and/or sensed parameter(s) or changes in sensed parameter(s) during the procedure; a fourth mode wherein the control module 102 maintains a variable selected output power, current and/or voltage values at site "B", which is dependent upon (i.e., a function of) time value(s) and/or sensed parameter(s) or changes in sensed parameter(s) during the procedure. Functions performed on the time value(s) and sensed properties(s) include operations such as calculations and/or look-up operations using a table or map stored by or accessible by the control module 102. The control module 102 processes the selected output power, current and voltage values, such as by performing calculations or table look up operations, to determine power control signal values and output control values.

[0028] It is also envisioned that, the control module 102 determines initial settings for control signals to the power supply 106 and the output stage 104 by using and/or processing operator-entered data or settings, performing calculations and/or accessing a look-up table stored by or accessible by the control module 102. Once the electrosurgical procedure begins, the sensors of sensor module 110 sense various physical and electrical properties and provide feedback to the control

module 102 through the ADC 114 as needed. The control module 102 processes the feedback information in accordance with the pre selected mode, as well as any additional operator-entered commands entered during the procedure. The control module then sends control information to the power supply 106 and the output stage 104. It is contemplated that the generator 101 may be provided with override controls, to allow the operator to override the control signals provided by the control module 102, if needed, e.g., by entering override commands via the user interface 108.

[0029] FIG. 3 shows a flow chart illustrating a method for controlling operation of the closed loop control system 100 during an electrosurgical procedure in accordance with an embodiment of the present disclosure. At step 302, the method includes continually sensing various physical and electrical properties at the surgical site. At step 304, the sensed properties are continually processed. At step 306, power supply control signals are continually generated for controlling the magnitude of the signals output by the electrosurgical generator and output stage control signals are continually generated, for controlling pulse parameters of the output signals in accordance with the continually-processed sensed properties.

[0030] It is contemplated that the sensor module 110 further includes a proximity sensor for sensing (measuring) tissue thickness proximate the surgical site "B", and generating a tissue thickness value. An initial tissue thickness value may be provided to the control module 102 as a pre-surgical parameter. Sensed real time tissue thickness values and/or changes in tissue thickness values over time ($\Delta[\text{difference}] \text{ thickness} / \Delta[\text{difference}] \text{ time}$) may further be provided to the control module 102 during the surgical procedure, where the control module 102 modulates the electrical surgical output in accordance with the sensed real time tissue thickness values and/or changes in tissue thickness values over time.

[0031] It is further contemplated that the sensor module 110 further includes an additional sensor module (or the same sensor module 110 with additional capabilities) for sensing (measuring) tissue moisture (which is often indicative of tissue type) and generating a moisture content value and/or determining tissue type. It is envisioned that moisture content is determined from tissue compliance data or optical clarity. The additional sensor module may include an infrared or optical sensor for sensing (measuring) light or energy generated by a source, such as an infrared or other light source, which is transmitted through or reflected from the tissue, where the sensed value is indicative of tissue moisture content and/or tissue type of tissue proximate the surgical site "B". An initial tissue moisture content value and/or tissue type may be provided to the control module 102 as a pre-surgical parameter. Sensed real time moisture content values and/or changes in moisture content over time ($\Delta(\text{difference}) \text{ moisture content} / \Delta(\text{difference}) \text{ time}$) may further be provided to the control module 102 dur-

ing the surgical procedure, where the control module 102 modulates the electrical surgical output in accordance with the sensed real time moisture content values and/or changes in moisture content values over time.

[0032] Accordingly, the present disclosure provides a closed loop control system 100 for providing continual control of the power supply 106 and the output stage 104 in response to "sensed" physical or electrical properties at the surgical site and/or proximate the output stage.

[0033] In an additional embodiment according to the present disclosure and in particular reference to FIG. 4, the control module 102 is provided with two control loops, an inner loop controlled by inner loop control module 402 and an outer loop controlled by outer loop control module 404. Preferably, the inner and outer loop control modules 402, 404 are software modules executable by a processor of the control module 102. The inner and outer loop control modules 402, 404 both receive signals generated by sensor module 110.

[0034] The inner loop control module 402 controls the amount of current, voltage and/or power delivered to the tissue for controlling a variable, e.g., I, V or P, sensed at the tissue and/or calculated from sensed values, until a desired event occurs (a rapid dz/dt or impedance rise is achieved), e.g., an impedance value is reached preferably in the range of about 200 ohms to about 400 ohms. The control variable is controlled to change during the course of the seal cycle according to impedance value (or other sensed and/or derived values), as determined by generator limitations (power, current, voltage) and surgical limitations (maximum limits for application of energy to tissue).

[0035] The inner loop control module 402 continually receives real time sensed values, such as current I and voltage V, from the sensor module 110 and may perform calculations on the received values for deriving additional real time values, such as power P and impedance Z. A desired inner loop value for I, V, and/or P are obtained by accessing at least one stored inner mapping of continuous values 408, look-up table or equivalent, where preferably the inner mapping 408 is in accordance with a function of impedance. Preferably, the inner loop control module 402 consults the inner mapping 408 for obtaining the desired inner loop value for the impedance currently being sensed and derived.

[0036] An algorithm is used to compare the real time value of I, V and/or P to the respective desired inner loop value and output an RF command to the electrosurgical generator 101 accordingly for achieving the desired inner loop value without exceeding the desired inner loop value, e.g., the RF command raises the target current, voltage and/or power output by the electrosurgical generator 101 when the real time value for I, V and/or P is lower than the respective desired inner loop value for I, V and/or P, and vice versa. It is contemplated that the RF command-controls waveform parameters of electrosurgical energy output by the electrosurgical generator

101, including current, power, voltage, duty cycle, frequency, waveshape, etc. It is further contemplated that the inner loop is used without the outer loop for achieving the desired tissue effect.

[0037] The outer loop control module 404, layered over the inner loop control module 402, provides additional control of a variable for reaching a desired output value or effect. For example, control of the variable may monitor/regulate the rate of change of impedance of the tissue (sensed and calculated). In different embodiments, the variables controlled may include temperature, rate of change of temperature, and/or the energy input to the tissue. Outer loop control module 404 continually receives sensed values, such as i, V and temperature T from the sensor module 110 at a time "t" and performs calculations on the sensed values and preferably stored values for deriving values such as rate of change of impedance and/or rate of change in temperature. For example, the value for change in impedance (dz/dt) is obtained in accordance with:

$$(1) \quad dz/dt = (Z - Z_OLD)/(t - t_OLD);$$

$$Z_OLD = Z;$$

where Z is the impedance in accordance with values measured at time t;

and

Z_OLD is the stored impedance in accordance with values measured at a previous time interval at time t_OLD

[0038] An outer loop desired value for the control variable is obtained by accessing a stored outer mapping of continuous values 406, or alternatively a table or equivalent. The desired rate of change according to outer mapping 406 may be steady, or may depend on the stage of the seal cycle and change over time. The tissue is in a dynamic state during the seal procedure, and the outer loop monitors the rate of change throughout the procedure to determine the degree to which the desired rate of change is being achieved. When the control variable is temperature, a temperature map may be used for outer mapping 406 in which desired temperature is plotted versus time. When the control variable is rate of change in temperature, a rate of change in temperature map may be used for outer mapping 406 in which desired temperature is plotted versus time. Energy may be applied in a similar fashion, where an energy function can be calculated using equations derived for specific tissue types or using sensed values.

[0039] An algorithm is used to compare the real time sensed/calculated value of rate of change of impedance, temperature, rate of change of temperature and/or energy at time "t" to the respective desired outer value at time "t" obtained from the outer mapping 406 for determining if the desired outer value is met, and if not, for

determining the ratio of the difference between the real time value and the desired outer value to the desired outer value. If the desired outer value is not being met, the outer loop module 406 generates a set point value which is provided to the inner loop module 402. The set point value is raised when the real time value for rate of change of impedance, temperature and/or rate of change of temperature is lower than the respective desired outer value for rate of change of impedance, temperature and/or rate of change of temperature, and vice versa.

[0040] The set point value is preferably a ratio signal for altering the inner mapping 408 by raising or lowering a plotted curve of the inner mapping 408 along the y-axis. Preferably, the ratio signal is a proportional integral derivative (PID) control signal, as is known in the art. The inner loop control module 402 responds instantaneously by accessing the altered inner mapping 408 for obtaining a desired inner value from the outer loop, comparing the real time value of the control variable, generating an RF command for achieving the desired inner value without exceeding the desired inner value, and outputting the RF command accordingly to the electrosurgical generator 101 for controlling voltage, current and/or power needed for achieving a desired tissue effect.

[0041] Preferably the outer loop control module 404 uses the real time value of rate of change of impedance, temperature, rate of change of temperature, and/or total energy delivered to determine if a desired outer value has been reached which indicates completion of a seal. Upon determination of seal completion, a stop signal is generated for stopping the sealing process. Otherwise, the outer loop continues to monitor, receive and process sensed values from the sensor module 110.

[0042] Control of I, V and/or P by the inner loop control module 402 improves system stability and control capabilities in low impedance ranges, e.g., 0-20 ohms, which are critical for seal initiation, particularly by avoiding a low-end impedance break point which induces oscillation and lack of system control. The outer loop control enhances the control module's ability to control sealing in accordance with desired trends or events, to change seal intensity by changing the rate of change of impedance, and to enhance uniform sealing of tissue, i.e., normalize tissue in terms of variability, including tissue hydration, volume and composition. With feedback control and continuous sensing of the tissue's condition, there is not a need to switch control variables (i.e., low/high end break points), which improves system stability as explained above.

[0043] It is contemplated that the control module 102 controls a module for producing resistive heat for regulating heat applied to the tissue for achieving the desired tissue effect instead of or in addition to controlling the electrosurgical output stage 104 and/or the power supply 106. The control module 102 responds to sensed tissue temperature or other sensed properties indicative

of tissue temperature, accesses at least one mapping, data table or equivalent using the sensed values for obtaining desired output current or resistivity values, and outputs a command signal for controlling output heat resistivity. Preferably, the module for producing resistive heat includes a current source and/or a variable resistor which are responsive to the command signal for outputting a desired current or providing a desired resistance, respectively.

[0044] It is envisioned that in another embodiment of the invention the control system includes a sensor module for sensing at least one property associated with a surgical site during at least one of a pre-surgical time prior to a surgical procedure, the surgical procedure and a post-surgical time following the surgical procedure for generating at least one signal relating thereto; and a control module executable on a processor for receiving said at least one signal and processing each of said signals using at least one of a computer algorithm and a mapping and generating at least one control signal in accordance with the processing, and providing the at least one control signal to the electrosurgical generator for controlling the generator. Preferably, the processing includes determining tissue type of tissue proximate the surgical site.

[0045] In an additional preferred embodiment, the sensor module 110 (or an additional sensor module (not shown)) senses at least one property as a pre-surgical condition, as a concurrent surgical condition and/or as a post-surgical condition. Preferably, the sensor module 110 senses at least two surgical conditions (or changes in surgical conditions over time) selected from pre-surgical, concurrent surgical and post-surgical conditions. Pre-surgical conditions include: degree of opaqueness of tissue proximate the surgical site; moisture content level of the tissue; and/or thickness of the tissue. Concurrent conditions include: degree of opaqueness of the tissue proximate the surgical site; moisture content level of the tissue; thickness of the tissue; temperature of the tissue; impedance of the tissue; current across the tissue; voltage across the tissue; power across the tissue; changes in degree of opaqueness of the tissue; changes in moisture content level of the tissue; changes in thickness of the tissue; changes in temperature of the tissue; changes in impedance of the tissue; changes in current across the tissue; changes in voltage across the tissue; and changes in power across the tissue. The post-surgical conditions include: degree of opaqueness of tissue; proximate the surgical site; moisture content level of the tissue; thickness of the tissue; temperature of the tissue; and impedance of the tissue.

[0046] Preferably, at least one property sensed during the post-surgical condition is indicative of the quality of a tissue seal formed during the surgical procedure. In a preferred embodiment the sensor module 110 includes a light detector for detecting light generated by a light source and transmitted through (or reflected from) the tissue proximate the surgical site. A proximity sensor

having sensing elements placed at opposite surfaces of the tissue may also be included for sensing the distance between the elements which is indicative of the tissue thickness.

[0047] Although this disclosure has been described with respect to preferred embodiments, it will be readily apparent to those having ordinary skill in the art to which it appertains that changes and modifications may be made thereto without departing from the spirit or scope of the disclosure. For example, it is contemplated that the control module 102 may include circuitry and other hardware, rather than, or in combination with, programmable instructions executed by a microprocessor for processing the sensed values and determining the control signals to be sent to the power supply 106 and the output stage 104.

[0048] While several embodiments have been shown in the drawings, the above description should not be construed as limiting, but merely as exemplifications of preferred embodiments.

Claims

1. A method for performing an electrosurgical procedure at a surgical site on a patient (114), the method including the steps of:

applying at least one electrical pulse to the surgical site;
continually sensing electrical and physical properties proximate the surgical site; and
varying pulse parameters of individual pulses of the at least one pulse in accordance with the continually-sensed properties.

2. The method of claim 1, further comprising the step of continually processing the sensed properties; and wherein the varying step includes varying the pulse parameters in accordance with the processed sensed properties.
3. The method of claim 1 or 2, wherein the varying step includes continually generating power supply control signals for controlling a magnitude of individual pulses of the at least one pulse in accordance with the continually-sensed properties.
4. The method of claim 1, 2 or 3, wherein the varying step includes continually generating output stage control signals for controlling pulse parameters of pulses of the at least one pulse in accordance with the continually-sensed properties.
5. The method of any one of claims 1 to 4, further comprising the steps of:

receiving operator initialisation input settings;

processing the operator input settings; and
generating initial power supply control signals and output stage control signals in accordance with the processed input settings.

6. The method of any one of claims 1 to 5, wherein the continually sensing step comprises the step of continually sensing at least one of voltage and current returned from the surgical site.
7. The method of any one of claims 1 to 6, further comprising the step of varying the pulse parameters of individual pulses of the at least one pulse to maintain at least one of a selected voltage, electric current and electric power at the surgical site in response to the respective pulse.
8. A control system (100) for use with an electrosurgical generator (101) that generates electrosurgical energy including at least one pulse, the control system (100) comprising:

a sensor module (110) for sensing at least one property associated with a surgical site as one of a pre-surgical condition, concurrent surgical condition or a post-surgical condition and generating at least one signal relating thereto; and
a control module (102) executable on a processor for receiving said at least one signal from said sensor module (110) and processing each of said signals using at least one of a computer algorithm and a mapping and generating at least one control signal in accordance with the processing, said control module (102) providing the at least one control signal to the electrosurgical generator (101) for controlling the generator (101).

9. The control system according to claim 8, wherein the sensor module (110) senses the at least one property during at least two of the pre-surgical condition, the concurrent surgical condition and the post-surgical condition.
10. The control system according to claim 8 or 9, wherein the at least one property sensed during the pre-surgical condition includes at least one of: degree of opaqueness of tissue proximate the surgical site; moisture content level of tissue; and thickness of tissue.
11. The control system according to claim 8, 9 or 10, wherein the processing includes determining type of tissue.
12. The control system according to any one of claims 8 to 11, wherein the at least one property sensed during the concurrent surgical condition includes at

- least one of: degree of opaqueness of tissue proximate the surgical site; moisture content level of tissue; thickness of tissue; temperature of tissue; changes in degree of opaqueness of tissue; changes in moisture content level of tissue; changes in thickness of tissue; changes in temperature of tissue; changes in impedance of tissue; changes in current across tissue; changes in voltage across tissue; and changes in power across tissue.
13. The control system according to any one of claims 8 to 12, wherein the at least one property sensed during the post-surgical condition includes at least one of: degree of opaqueness of tissue proximate the surgical site; moisture content level of tissue; thickness of tissue; temperature of tissue; and impedance of tissue.
14. The control system according to any one of claims 8 to 13, wherein the at least one property sensed during the post-surgical condition is indicative of resulting quality of a tissue seal formed during the surgical procedure.
15. The control system according to any one of claims 8 to 14, wherein the sensor module includes at least one of a light detector for detecting light generated by a light source and transmitted through tissue proximate the surgical site and a proximity sensor having sensing elements placed at opposite surfaces of tissue for sensing distance between the elements.
16. The control system (100) according to any one of claims 8 to 15, wherein the sensor module (110) senses the at least one property continuously.
17. The control system (100) as claimed in any one of claims 8 to 16, said control module (102) comprising:
- a first control module (402) for controlling an inner control loop responsive to the at least one signal relating to said sensed properties, said first control module (402) for controlling at least one electrical characteristic of the electrosurgical energy generated by the electrosurgical generator (101); and
 - a second control module (404) for controlling an outer control loop responsive to the at least one signal from said sensor module (110) relating to said electrical and physical properties, said electrical and physical properties for controlling said second control module (404) including at least one of temperature, impedance and energy.
18. The control system (100) according to any one of claims 8 to 17, the system (100) being a closed-loop system.
19. A closed-loop control system (100) as claimed in any one of claims 8 to 18, said closed-loop control system (100) comprising:
- a user interface (108) for allowing a user to select at least one pre-surgical parameter, said at least one pre-surgical parameter including at least one of a type of surgical instrument operatively connected to the generator, type of tissue and desired surgical effect;
 - said sensor module (110) for continually sensing at least one of electrical and physical properties proximate a surgical site and generating at least one signal relating thereto; and
 - said control module (102) for continually receiving said selected at least one pre-surgical parameter from said user interface (108) and each of said signals from said sensor module (110), and processing each of said signals in accordance with the at least one pre-surgical parameter using at least one of a microprocessor, computer algorithm and a mapping, said control module (102) generating at least one corresponding control signal relating to each signal from said sensor module (110), and providing the at least one control signal to the electrosurgical generator (101) for controlling the generator (101).
20. The closed-loop control system (100) according to claim 19, wherein said user interface (108) includes at least one additional sensor for automatically selecting a pre-surgical parameter of the at least one pre-surgical parameter.
21. The closed-loop control system (100) according to claim 19 or 20, wherein said at least one control signal controls said generator (101) to adjust at least one parameter of the generated electrosurgical energy in response to the signals received from said control module (102).
22. The closed-loop control system (100) according to claim 19, 20 or 21, wherein said at least one control signal is capable of controlling said generator (101) to adjust voltage, current, pulse width, pulse frequency, amplitude, crest factor, duty cycle, repetition rate, and wave shape.
23. The closed-loop control system (100) according to any one of claims 19 to 22, wherein the generator (101) includes a power source (106), and wherein the at least one control signal includes a power control signal for controlling the power source (106) for

adjusting a magnitude of an electrical characteristic of individual pulses of at least one pulse.

24. The closed-loop control system (100) according to any one of claims 19 to 23, wherein the at least one control signal adjusts wave shape parameters of individual pulses of the at least one pulse. 5
25. The closed-loop control system (100) according to any one of claims 19 to 24, wherein the at least one control signal controls at least one of repetition rate and duty cycle of the at least one pulse. 10
26. The closed-loop control system (100) according to any one of claims 19 to 25, wherein the sensor module (110) includes at least one of a voltage sensor (202, 206), a current sensor (204, 208), a temperature sensor, an RMS voltage sensor (210, 214) and a leakage current sensor, and the microprocessor processes signals output by the RMS voltage sensor, the RMS current sensor and the leakage current sensor for deriving respective corresponding values for RMS voltage, RMS current and leakage current. 15 20 25
27. The closed-loop control system (100) according to any one of claims 19 to 26, wherein the sensor module (110) includes a voltage sensor for sensing voltage returned from the surgical site. 30
28. The closed-loop control system (100) according to any one of claims 19 to 27, wherein the sensor module (110) includes a current sensor for sensing current returned from the surgical site. 35
29. The closed-loop control system (100) according to any one of claims 19 to 28, wherein the sensor module (110) includes means for measuring electrical impedance. 40
30. The closed-loop control system (100) according to any one of claims 19 to 29, wherein the closed-loop control system (100) further includes means for measuring changes in sensed temperature. 45
31. The closed-loop control system (100) according to any one of claims 19 to 30, wherein the closed-loop control system (100) further includes means for processing information from the sensor module (110) for determining electrical impedance at the surgical site. 50
32. The closed-loop control system (100) according to claim 31, wherein the processing means measures changes in the electrical impedance. 55
33. The closed-loop control system (100) according to any one of claims 19 to 32, wherein the user inter-

face (108) further allows a user to enter commands for processing by the control module (102) for controlling the electrosurgical generator (101) to generate the energy having at least one of a target electrical parameter including at least one of voltage, current, power, frequency and amplitude; pulse parameter including at least one of pulse width, duty cycle, crest factor and repetition rate; and electrical parameter change in response to changes in at least one of sensed physical and electrical properties.

34. A system for electrosurgically sealing tissue, comprising an electrosurgical generator comprising an RF energy source and a controller (102) for controlling the operation of an electrosurgical generator (101), said electrosurgical generator (101) having an output for coupling to a surgical instrument comprising electrodes for coupling RF energy generated by said electrosurgical generator (101) to tissue to be sealed; said controller (102) being operable for causing said electrosurgical generator to apply an initial pulse of RF energy to the tissue and for measuring a value of an electric characteristic of the tissue in response to the applied initial pulse, said controller being responsive to the measured electrical characteristic for determining an initial set of pulse parameters for a subsequent pulse and for then varying the pulse parameters of individual pulses of further subsequent RF energy pulses in accordance with a change in the electrical characteristic of the tissue; 25 30

wherein the controller (102) is further operable for measuring an electrical and a physical characteristic of the tissue in response to the individual pulses and for then varying the pulse parameters of subsequent individual pulses in accordance with the electrical and physical characteristics of the tissue.

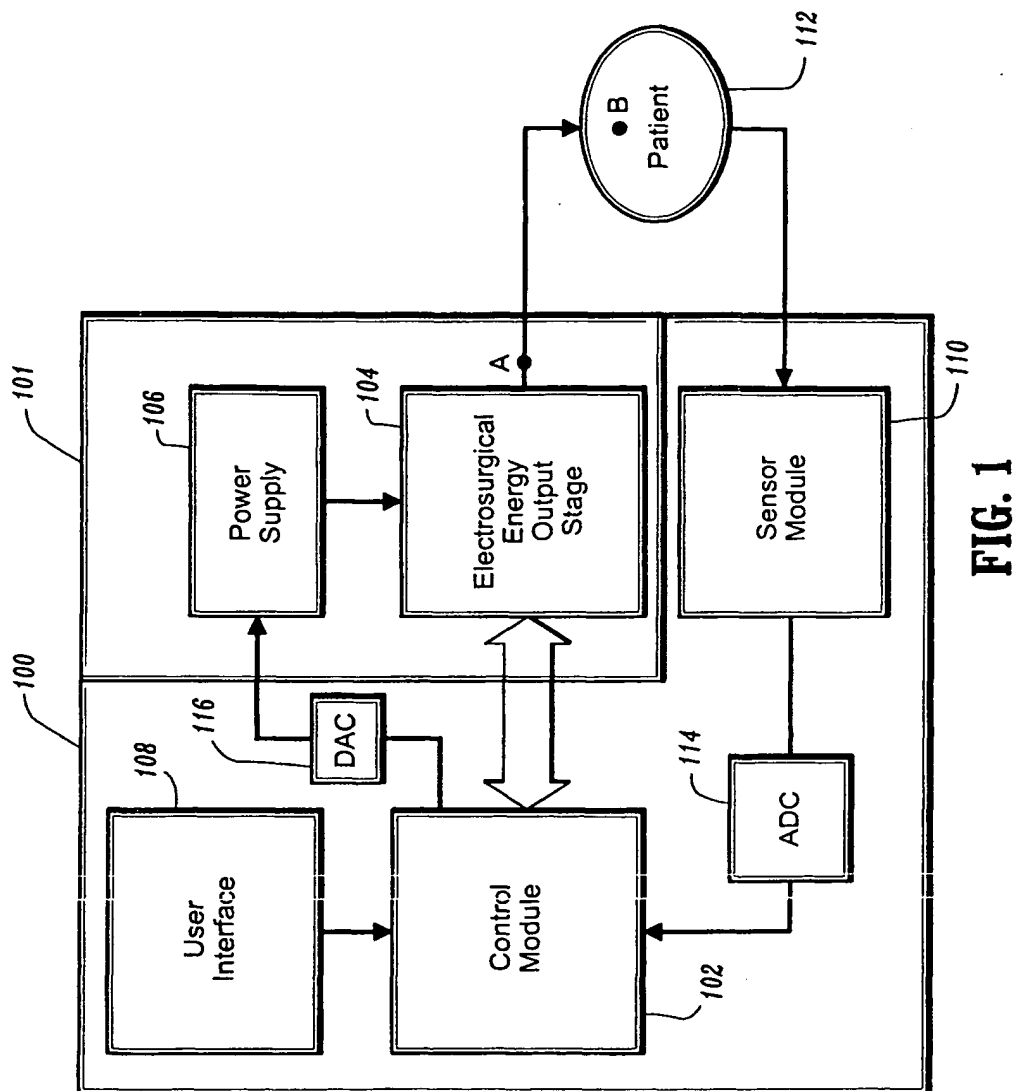


FIG. 1

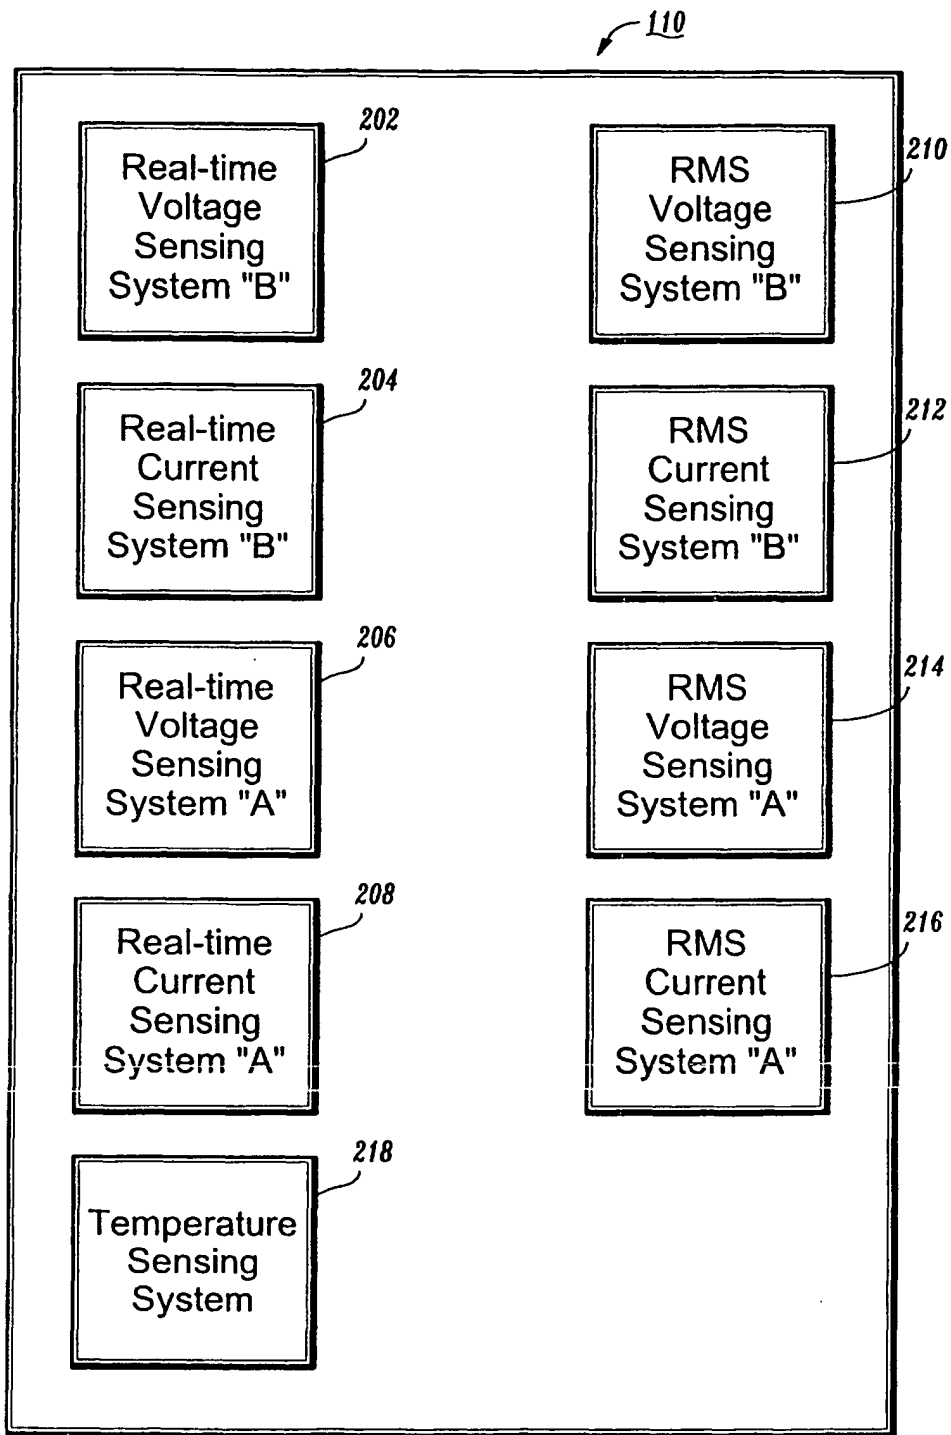


FIG. 2

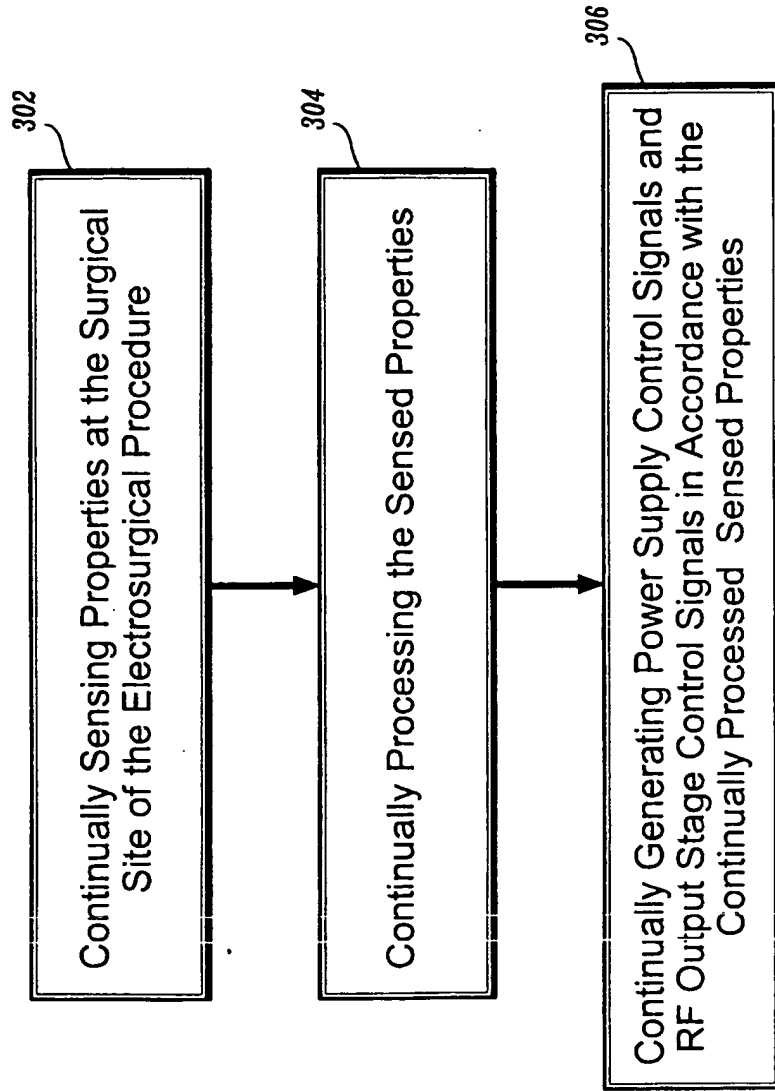


FIG. 3

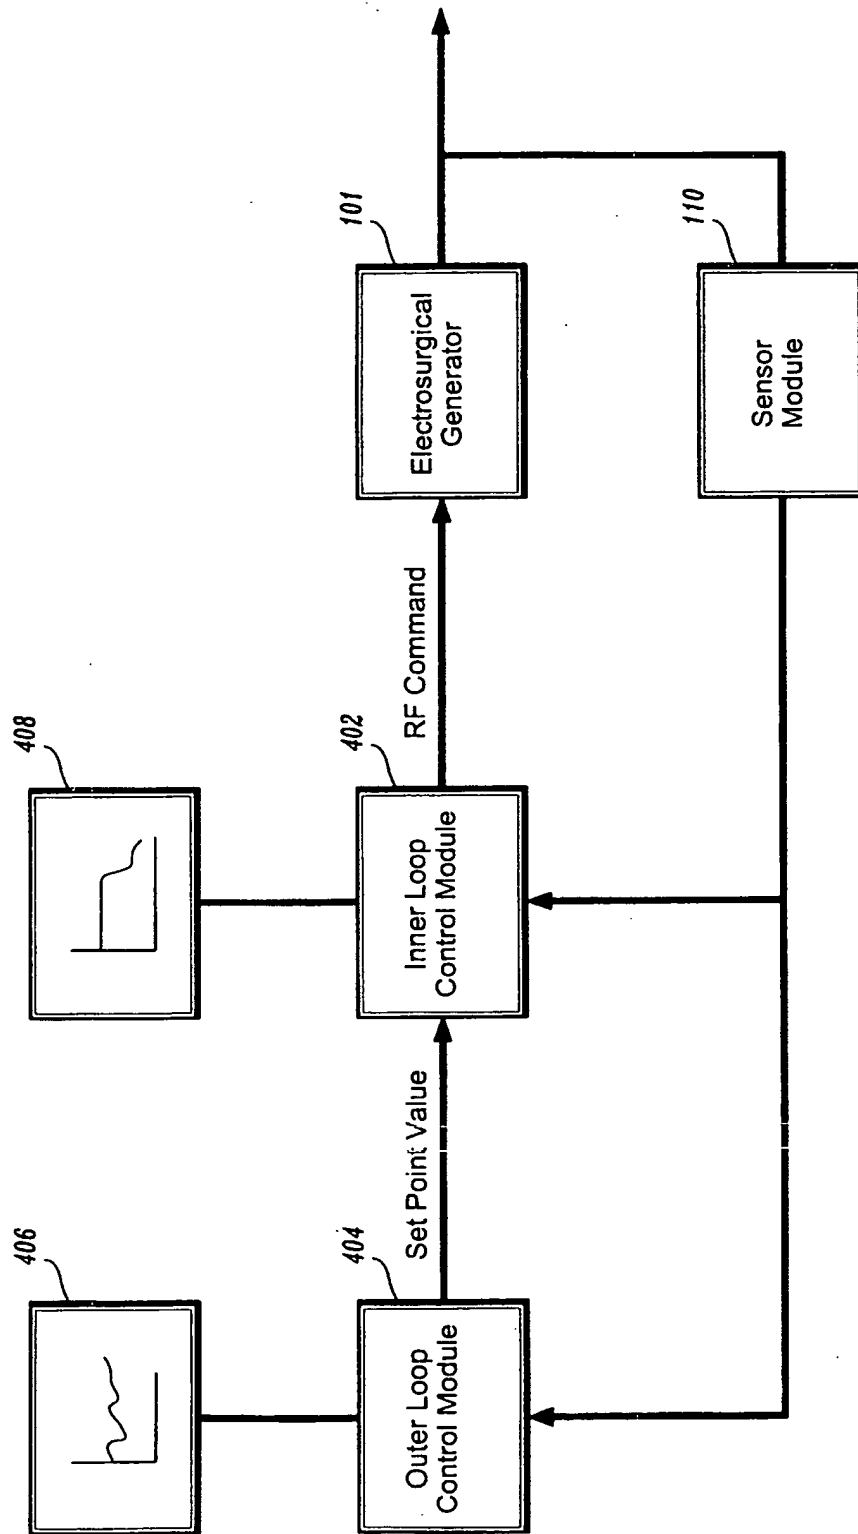


FIG. 4



European Patent
Office

PARTIAL EUROPEAN SEARCH REPORT

Application Number

which under Rule 45 of the European Patent Convention EP 04 00 9964 shall be considered, for the purposes of subsequent proceedings, as the European search report

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
D,X	US 6 398 779 B1 (WHAM ROBERT H ET AL) 4 June 2002 (2002-06-04) * column 4, line 38 - line 65 * * column 6, line 66 - column 7, line 20 * * column 9, line 54 - column 12, line 53 * -----	8-29, 31-34	A61B18/12
X	US 5 722 975 A (STERN ROGER A ET AL) 3 March 1998 (1998-03-03) * column 4, line 14 - line 44 * * column 5, line 66 - column 6, line 18 * * column 6, line 59 - column 7, line 24 * * column 11, line 12 - line 49 * -----	8-10, 12-24, 26-34	
X	US 2002/035363 A1 (BAKER JAMES ET AL) 21 March 2002 (2002-03-21) * paragraph [0079] - paragraph [0092]; figure 9 * ----- -/--	8-10, 12-34	
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
			A61B
INCOMPLETE SEARCH			
<p>The Search Division considers that the present application, or one or more of its claims, does/do not comply with the EPC to such an extent that a meaningful search into the state of the art cannot be carried out, or can only be carried out partially, for these claims.</p> <p>Claims searched completely :</p> <p>Claims searched incompletely :</p> <p>Claims not searched :</p> <p>Reason for the limitation of the search:</p> <p>see sheet C</p>			
Place of search		Date of completion of the search	Examiner
Berlin		13 July 2004	Trachterna, M
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03 82 (P040307)



European Patent
Office

**INCOMPLETE SEARCH
SHEET C**

Application Number
EP 04 00 9964

Claim(s) searched completely:
8-34

Claim(s) not searched:
1-7

Reason for the limitation of the search (non-patentable invention(s)):

Article 52 (4) EPC - Method for treatment of the human or animal body by surgery



European Patent
Office

PARTIAL EUROPEAN SEARCH REPORT

Application Number
EP 04 00 9964

DOCUMENTS CONSIDERED TO BE RELEVANT			CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	
X	US 5 558 671 A (YATES DAVID C) 24 September 1996 (1996-09-24) * column 6, line 33 - line 59 * * column 8, line 8 - column 10, line 18 * -----	8-10, 12-24, 26-29, 31-34	
A	EP 0 878 169 A (ETHICON ENDO SURGERY INC) 18 November 1998 (1998-11-18) * column 12, line 18 - line 36 * -----	15	
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)

EPO FORM 1503 03.92 (P04C10)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 04 00 9964

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

13-07-2004

Patent document cited in search report		Publication date		Patent family member(s)	Publication date
US 6398779	B1	04-06-2002	US	2003004510 A1	02-01-2003
			US	2004015163 A1	22-01-2004
US 5722975	A	03-03-1998	US	5423808 A	13-06-1995
			AU	3128593 A	07-06-1993
			CA	2106409 A1	09-05-1993
			EP	0566731 A1	27-10-1993
			JP	7500756 T	26-01-1995
			WO	9308756 A1	13-05-1993
US 2002035363	A1	21-03-2002	US	5935123 A	10-08-1999
			US	5599345 A	04-02-1997
			US	5458597 A	17-10-1995
			US	6605085 B1	12-08-2003
			US	6660002 B1	09-12-2003
			US	6632221 B1	14-10-2003
			US	6632222 B1	14-10-2003
			US	6641580 B1	04-11-2003
			US	6569159 B1	27-05-2003
			AU	1989397 A	22-10-1997
			WO	9736548 A1	09-10-1997
			AU	1051495 A	29-05-1995
			WO	9513113 A1	18-05-1995
			US	5472441 A	05-12-1995
			US	5536267 A	16-07-1996
			US	5507743 A	16-04-1996
			US	5599346 A	04-02-1997
			US	6471698 B1	29-10-2002
			US	5683384 A	04-11-1997
			US	6071280 A	06-06-2000
			US	5928229 A	27-07-1999
US 5558671	A	24-09-1996	US	5403312 A	04-04-1995
			AT	239920 T	15-05-2003
			AU	3179795 A	04-04-1996
			CA	2158783 A1	24-03-1996
			DE	69530646 D1	12-06-2003
			DE	69530646 T2	25-03-2004
			EP	1151725 A1	07-11-2001
			EP	0703461 A2	27-03-1996
			ES	2198433 T3	01-02-2004
			JP	8196543 A	06-08-1996
			US	5807393 A	15-09-1998
			US	5817093 A	06-10-1998
			US	6024741 A	15-02-2000
			AT	184467 T	15-10-1999

EPO FORM P0439

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 04 00 9964

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

13-07-2004

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5558671	A		AU 687405 B2	26-02-1998
			AU 6862294 A	02-02-1995
			CA 2128450 A1	23-01-1995
			DE 69420650 D1	21-10-1999
			DE 69420650 T2	25-05-2000
			EP 0640317 A1	01-03-1995
			ES 2136168 T3	16-11-1999
			GR 94100336 A	22-05-1996
			JP 7171163 A	11-07-1995
			US 5709680 A	20-01-1998
			US 5688270 A	18-11-1997
			US 5693051 A	02-12-1997
			US 5833690 A	10-11-1998
			US 5810811 A	22-09-1998
			US 5876401 A	02-03-1999
EP 0878169	A	18-11-1998	US H2037 H1	02-07-2002
			AU 729567 B2	01-02-2001
			AU 6486998 A	19-11-1998
			CA 2237423 A1	14-11-1998
			EP 0878169 A1	18-11-1998
			JP 11070124 A	16-03-1999

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82